






SM1500 - Series 1500W DC POWER SUPPLIES

Models	Voltage range	Current range
SM 15-100	0 - 15 V	0 - 100 A
SM 35-45	0 - 35 V	0 - 45 A
SM 52-30	0 - 52 V	0 - 30 A
SM 52-AR-60 Autoranging output	0 - 26 V 0 - 52 V	0 - 60 A 0 - 30 A
SM 70-22	0 - 70 V	0 - 22 A
SM 120-13	0 - 120 V	0 - 13 A
SM 300-5	0 - 300 V	0 - 5 A
SM 400-AR-8 Autoranging output	0 - 200 V 0 - 400 V	0 - 8 A 0 - 4 A



Features

- cTUVus safety approval
- Designed for long life at full power
- Excellent dynamic response to load changes
- Protected against all overload and short circuit conditions
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: temperature controlled fans
- Available options: analog & digital Interfaces, High Speed Programming, Digital Encoders, Sequencer, Power Sink etc.

Functionalities

- Master/Slave parallel and series operation with voltage and current sharing
- Stacking is allowed, space between units is not required
- High power system configuration from multiple units
- 19" rack mounting or laboratory use (feet included)
- Remote sensing
- Interlock

	SM 15-100	SM 35-45	SM 52-30	SM 52-AR-60	SM 70-22	SM 120-13	SM 300-5	SM 400-AR-8
DC Power terminals								
voltage	0 - 15 V	0 - 35 V	0 - 52 V	0 - 52 V	0 - 70 V	0 - 120 V	0 - 300 V	0 - 400 V
current	0 - 100 A	0 - 45 A	0 - 30 A	0 - 60 A	0 - 22 A	0 - 13 A	0 - 5 A	0 - 8 A
AUTORANGING (2 ranges)	no	no	no	yes	no	no	no	yes
Max. output current / voltages	/	/	/	60 A / 0-26 V 30 A / 26-52 V	/	/	/	8 A / 0-200 V 4 A / 200-400 V
AC Input								
single phase, 48 - 62 Hz	90-265 V	90-265 V	90-265 V	90-265 V	90-265 V	90-265 V	90-265 V	90-265 V
rated voltage range	100-240 V	100-240 V	100-240 V	100-240 V	100-240 V	100-240 V	100-240 V	100-240 V
rated frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
rated current	max 16A	max 16A	max 16A	max 16A	max 16A	max 16A	max 16A	max 16A
Power Derating vs input:								
90 V : P _{out max} (W), I _{in} (A)	1170, 16	1185, 16	1200, 16	1200, 16	1200, 16	1200, 16	1200, 16	1200, 16
100 V: P _{out max} (W), I _{in} (A)	1317, 16	1334, 16	1350, 16	1350, 16	1350, 16	1350, 16	1350, 16	1350, 16
110 V: P _{out max} (W), I _{in} (A)	1492, 16	1498, 16	1505, 16	1505, 16	1505, 16	1505, 16	1505, 16	1505, 16
230 V: P_{out max} (W), I_{in} (A)	1500, 7.5	1575, 7.7	1560, 7.7	1560, 7.7	1540, 7.6	1560, 7.7	1500, 7.4	1600, 7.8
power factor, 100%, 50% load	0.99, 0.98	0.99, 0.98	0.99, 0.98	0.99, 0.98	0.99, 0.98	0.99, 0.98	0.99, 0.98	0.99, 0.98
internal fuses	25 AT	25 AT	25 AT	25 AT	25 AT	25 AT	25 AT	25 AT
standby input power (V _o =I _o =0)	12 W	12 W	12 W	12 W	12 W	12 W	12 W	12 W
standby input power (V _o =V _{max})	22 W	22 W	22 W	22 W	22 W	22 W	22 W	25 W
				26 V / 52 V				200 V / 400 V
Efficiency								
230 V AC, 1 ph input, full load	87 %	90 %	90 %	89 / 90 %	90 %	90 %	91 %	90 / 91 %
115 V AC, 1 ph input, full load	83 %	86 %	86 %	84 %	86 %	86 %	86 %	86 %
Regulation								
Load 0 - 100% CV	0.5 mV	1 mV	2 mV	2 mV	2.5 mV	4 mV	10 mV	12 mV
Line 120 - 265 V AC CV (measured on sense block)	0.2 mV	0.5 mV	0.7 mV	0.7 mV	1 mV	2 mV	3 mV	4 mV
Load 0 - 100% CC	5 mA	3 mA	1.5 mA	2 mA	1 mA	0.6 mA	0.5 mA	0.5 mA
Line 120 - 265 V AC CC (internal voltage sense)	1 mA	0.5 mA	0.5 mA	1 mA	0.25 mA	0.2 mA	0.1 mA	0.2 mA
Ripple + noise								
rms (BW=300 kHz)	2 mV	1.8 mV	2 mV	2 mV	3 mV	7 mV	7 mV	15 mV
CV	8 mV	8 mV	15 mV	15 mV	15 mV	30 mV	50 mV	80 mV
p-p (BW=20 MHz)								
CV	15 mA	5 mA	3 mA	10 / 3 mA	3 mA	2 mA	0.5 mA	1.2 / 0.6 mA
	80 mA	15 mA	10 mA	30 / 10 mA	10 mA	6 mA	4 mA	6 / 3 mA
rms (BW=300 kHz)								
CC								
p-p (BW=20 MHz)								
CC								
CC-ripple at full load								
Temp. coeff., per °C⁻¹ CV	35.10 ⁻⁶							
CC	60.10 ⁻⁶							
Stability ¹ after 1 hr warm-up during 8 hrs	6.10 ⁻⁵							
CV	9.10 ⁻⁵							
CC	(internal voltage sensing for CC-stab.)							
t _{amb} = 25 ± 1 °C, V _{in} = 230 VAC								

Analog Programming		CV	CC
Programming inputs			
input range		0 - 5 V	0 - 5 V
accuracy		$\pm 0.2\%$	$\pm 0.5\%$
offset		- 0.1 ... +1.3 mV (on 5V)	0 ... +2.2 mV (on 5V)
temp. coeff. offset		10 $\mu\text{V} / ^\circ\text{C}$	50 $\mu\text{V} / ^\circ\text{C}$
input impedance		> 1 MOhm	> 1 MOhm
Monitoring outputs			
input range		0 - 5 V	0 - 5 V
accuracy		$\pm 0.2\%$	$\pm 0.2\%$
offset		- 1 ... 0 mV (on 5V)	- 1.1 ... 0 mV (on 5V)
temp. coeff. offset		3 $\mu\text{V} / ^\circ\text{C}$	60 $\mu\text{V} / ^\circ\text{C}$
input impedance		2 Ohm / max. 4mA	2 Ohm / max. 4mA
ISO AMP Programming (optional)		Isolated analog programming, range 0 - 5 V / 200 kOhm or 0 - 10 V / 400 kOhm. See datasheet ISO AMP on www.DeltaPowerSupplies.com for accuracy, offset etc.	
Reference voltage			
on prog. connector	V_{ref} TC	5.114 $\pm$ 15 mV (Ro = 2 Ohm, max. 4 mA) 20 ppm	
+12 V output			
on prog. Connector	V_o I_{max} R_o	12 V $\pm$ 0.2 V 0.2 A 3 Ohm	

Status Outputs			
CC	- status	CC - operation	5 V = logic 1 (Ro = 500 Ohm)
LIM	- status	CV or CC limit	5 V = logic 1 (Ro = 500 Ohm)
OT	- status	Over Temperature	5 V = logic 1 (Ro = 500 Ohm)
PSOL	- status	Power Sink Overload	5 V = logic 1 (Ro = 500 Ohm)
ACF	- status	AC - Fail	5 V = logic 1 (Ro = 500 Ohm)
DCF	- status	DC - Fail ¹⁾	5 V = logic 1 (Ro = 500 Ohm)
Relay Outputs			
ACF		AC - Fail	both NO and NC contact
DCF		DC - Fail ²⁾	both NO and NC contact ²⁾ output $\pm$ 5% beyond set point
Remote shutdown		with + 5 V, 1 mA or relay contact	
Interlock		contact at rear panel, see photo of rear panel on page 1-6	
Indicators (front panel)		AC-Fail, DC-Fail, Over Temperature, Power Sink Overload, Remote-ShutDown, Remote-CV, Remote-CC, Output On, CV-limit, CC-limit, CV- and CC- mode	
Controls (front panel)		Mains on/off, CV-and CC-potmeter, CV- and CC-limit-potmeter, Display-Settings button, Display-Limits button, Remote/Local, Output On/Off, Front panel Lock	

Notes: 1. Measured at full load. 2. See "Safety instructions" in the product manual.

Programming speed <i>Standard Version</i> (resistive load)	SM 15-100	SM 35-45	SM 52-30	SM 52-AR-60	SM 70-22	SM 120-13	SM 300-5	SM 400-AR-8
Rise time (10 - 90%) output voltage step time, (100 % load) time, (10 % load)	0 → 15 V 6.1 ms 2.1 ms	0 → 35 V 15.4 ms 5.1 ms	0 → 52V 7.3 ms 2.4 ms	0 → 26 V 8.5 ms 2.8 ms	0 → 70 V 13.2 ms 4.4 ms	0 → 120 V 3.4 ms 2 ms	0 → 300 V 9 ms 3.9 ms	0 → 200 V 3.7 ms 2.6 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	- - -	0 → 52 V 34.2 ms 11 ms	- - -	- - -	- - -	0 → 400 V 15 ms 5 ms
Fall time (90 - 10%) output voltage step time, (100 % load) time, (10 % load)	15 → 0 V 6.1 ms 61 ms	35 → 0 V 14.7 ms 147 ms	52 → 0 V 7 ms 70 ms	26 → 0 V 8.2 ms 82 ms	70 → 0 V 12.9 ms 129 ms	120 → 0 V 3.3 ms 33 ms	300 → 0 V 9 ms 90 ms	200 → 0 V 3.5 ms 35 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	- - -	52 → 0 V 33 ms 330 ms	- - -	- - -	- - -	400 → 0 V 14.2 ms 142 ms
Programming speed <i>Optional High Speed</i> (resist. load)	SM 15-100 <i>Option P210</i>	SM 35-45 <i>Option P211</i>	SM 52-30 <i>Option P212</i>	SM 52-AR-60 <i>Option P213</i>	SM 70-22 <i>Option P214</i>	SM 120-30 <i>Option P215</i>	SM 300-5 <i>Option P216</i>	SM 400-AR-8 <i>Option P217</i>
Rise time (10 - 90%) output voltage step time, (100 % load) time, (10 % load)	0 → 15 V 0.20 ms 0.11 ms	0 → 35 V 0.27 ms 0.14 ms	0 → 52V 0.32 ms 0.22 ms	0 → 26 V 0.44 ms 0.45 ms	0 → 70 V 0.47 ms 0.27 ms	0 → 120 V 0.46 ms 0.27 ms	0 → 300 V 1.0 ms 0.51 ms	0 → 200 V 0.35 ms 0.33 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	- - -	0 → 52 V 0.42 ms 0.34 ms	- - -	- - -	- - -	0 → 400 V 0.98 ms 0.59 ms
Fall time (90 - 10%) output voltage step time, (100 % load) time, (10 % load)	15 → 0 V 0.21 ms 1.6 ms	35 → 0 V 0.33 ms 3.5 ms	52 → 0 V 0.39 ms 3.6 ms	26 → 0 V 0.48 ms 1.9 ms	70 → 0 V 0.67 ms 6.4 ms	120 → 0 V 0.51 ms 4.5 ms	300 → 0 V 1.4 ms 13 ms	200 → 0 V 0.35 ms 3.8 ms
output voltage step time, (100 % load) time, (10 % load)	- - -	- - -	- - -	52 → 0 V 0.7 ms 6.5 ms	- - -	- - -	- - -	400 → 0 V 1.7 ms 18 ms
Ripple @ full load typical (rms/pp)	20 / 80 mV	50 / 200 mV	50 / 185 mV	26 V / 60 A 20 / 90 mV 52 V / 30A 20 / 90mV	30 / 125 mV	20 / 80 mV	25 / 115 mV	200V 85 / 355 mV 400 V 60 / 245 mV
Output Capacitance (typical)	390 µF	190 µF	135 µF	228 µF	135 µF	21 µF	10 µF	7 µF
	SM 15-100	SM 35-45	SM 52-30	SM 52-AR-60	SM 70-22	SM 120-13	SM 300-5	SM 400-AR-8
Recovery time recovery within di/dt of load step output voltage time, @ 50 - 100% load step max. deviation	50 mV 1.5 A/µs 14 V 100 µs 200 mV	50 mV 0.8 A/µs 30 V 100 µs 150 mV	100 mV 0.5 A/µs 48 V 100 µs 250 mV	26 / 52 V 60 mV 1.0/0.5 A/µs 24 / 48 V 100 / 100 µs 200/100 mV	100 mV 0.4 A/µs 65 V 100 µs 200 mV	0.7 V 0.2 A/µs 110 V 100 µs 2.2 V	1.0 V 0.1 A/µs 280 V 100 µs 1.5 V	200 / 400 V 1.0 / 0.5 V 0.2/0.1 A/µs 185 / 370 V 100 / 100 µs 2.5 / 1.5 V
Output impedance CV, 0-1 kHz CV, 1-100 kHz	< 1.3 mΩ < 25 mΩ	< 1.7 mΩ < 30 mΩ	< 3.5 mΩ < 30 mΩ	< 3.3 mΩ < 40 mΩ	< 7.5 mΩ < 30 mΩ	< 63 mΩ < 600 mΩ	< 125 mΩ < 1 Ω	< 83 mΩ < 1.3 Ω
Pulsating load max. tolerable AC component of load current f > 1 kHz f < 1 kHz	15 A _{rms} 100 A _{peak}	15 A _{rms} 45 A _{peak}	13 A _{rms} 30 A _{peak}	20 A _{rms} 60 / 30 A _{peak}	13 A _{rms} 22 A _{peak}	2.5 A _{rms} 13 A _{peak}	1.2 A _{rms} 5 A _{peak}	0.8 A _{rms} 8 / 4 A _{peak}
Insulation AC mains / DC power terminals creepage / clearance AC mains / case DC power terminals / case	3750 V _{rms} (1min.) 8 mm 2500 V _{rms} 600 V DC ²							
Safety	cTUVus / EN 60950 / EN 61010							
EMC Emission Immunity	EN 61326-1 , class B equipment (for use in domestic establishments) EN 61326-1 , equipment for use in industrial and domestic establishments							

Notes: 1. Measured at full load. 2. See "Safety instructions" in the product manual.

Operating Temperature	– 20 to + 50 °C @ full load, derate output to 75% at 60 °C
Humidity	maximum 95% RH, non-condensing, up to 40 °C maximum 75% RH, non-condensing, up to 50 °C
Storage temperature	– 40 to + 70 °C
Thermal protection	output shuts down in case of insufficient cooling
MTBF	500 000 hrs

Hold-Up time (@ 230 VAC input) V _{out} = 100%, I _{out} = 100% V _{out} = 85%, I _{out} = 100% V _{out} = 100%, I _{out} = 50%	16 ms 20 ms 36 ms
Turn on delay after mains switch on	480 ms @ 230 VAC, 700 ms @ 115 VAC
Inrush current	22 A @ 230 VAC, 27 A @ 115VAC

	SM 15-100	SM 35-45	SM 52-30	SM 52-AR-60	SM 70-22	SM 120-13	SM 300-5	SM 400-AR-8
Series operation max. total voltage Master / Slave operation	600 V ² yes							
Parallel operation Normal Master / Slave operation	no limit maximum 4 units							
Remote sensing max. voltage drop per load lead	2 V							
Limits Voltage adjust range Current adjust range	0 - 102 % 0 - 102 %							
Front panel CV/CC-controls resolution knob operation screwdriver adjustment Lock function for CV/CC-settings Selectable Start-up at 0V / 0A or at last settings	analog potentiometers ³⁾ 10 turns (0.03%) standard optional (P001) no ³⁾ no ³⁾ ^{3) optional with digital encoders (P220).}							
Meters scale voltage scale current accuracy read output read limit setting (d = digit)	3.5 digit 0 - 15.00V 0 - 100.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 35.0 V 0 - 45.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 52.0 V 0 - 30.0A 0.5% + 2d 2% + 2d	3.5 digit 0 - 52.0 V 0 - 60.0A 0.5% + 2d 2% + 2d	3.5 digit 0 - 70.0V 0 - 22.0 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 120.0V 0 - 13.00 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 300 V 0 - 5.00 A 0.5% + 2d 2% + 2d	3.5 digit 0 - 400 V 0 - 8.00 A 0.5% + 2d 2% + 2d

Mounting	stacking of units allowed, air flow is from left to right
AC Terminals	IEC320/C20, EN60320/C20
DC Terminals	M8 bolts
Programming connector	15 pole D-connector at rear panel (Female)
Interlock	contact at rear panel
Cooling audio noise level air flow	low noise blower, fan speed adapts to temperature of internal system ca. 45 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 50 dBA at full load, 50 °C ambient temperature, 1 m distance From left to right
Enclosure degree of protection	IP20
Dimensions front panel: h x w behind front panel: h x w x d	89 x 483 mm (19", 2 U) 89 x 443 x 365 mm
Weight	9.9 kg

Typical Applications

- Solar inverter testing, PV-Simulation
- Automotive battery simulations
- Driving PWM-Controlled DC motors
- Hybrid Car testing systems
- Controlled battery (dis)charging
- Accurate current sources
- ATE in industrial production lines
- Lasers
- Aerospace and military equipment
- Plasma chambers
- Sustainable energy

Available Options



Increased Output Power

The conservatively rated unit allows to deliver extra output with the same reliability.

At some derating, either the maximum output voltage or the maximum output current can be increased by about 10%.

Order Code :

- P069



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2ms rise time at full load) and lower output capacitance¹⁾. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers.

Order Codes :

- SM 15-100 P210 – SM35-45 P211
- SM 52-30 P212 – SM52-AR-60 P213
- SM 70-22 P214 – SM120-13 P215
- SM 300-5 P216 – SM400-AR-8 P217



Two-Quadrant Output Power Sink

Two quadrant operation maintains the DC output voltage constant regardless the output power is positive or negative¹⁾. Ideal for PWM-speed controlled DC-Motors and ATE systems.

Order Codes :

- SM 15-100 P202 – SM35-45 P203
- SM 52-30 P204 – SM52-AR-60 P205
- SM 70-22 P206



Sequencer

Arbitrary Waveform generator or standalone automation. The sequencer

Is integrated in the Ethernet controller.

Order Code :

- P177



Digital CV- and CC-Settings

Reliable, long-life digital encoders can be implemented at the front panel. Includes total front panel lock (also for CV- / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.

Order Code :

- P220



Secured Voltage and Current Settings

For maximum security, the CV/CC settings can be adjusted with a screwdriver only and are protected with a plastic cap from accidental adjusting.

Order Code :

- P001




Software Control and Interfaces

Interfaces to be installed by factory ²⁾.

Order Code:

- Ethernet controller (including sequencer) - P177
- ISO AMP Card - isolated analog - P218
- RS232 controller - P183

Notes: 1. Download datasheets about High Speed Programming, Power Sink and Battery Charging from www.DeltaPowerSupplies.com.
2. There is only room for one of the interfaces in a unit.

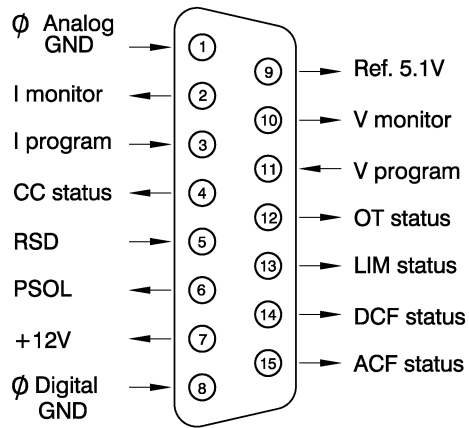

Connections analog programming connector

CV = Constant Voltage
CC = Constant Current

Specifications measured at
 $t_{amb} = 25 \pm 5^\circ\text{C}$ and $V_{in} = 230\text{ VAC}$,
50 Hz unless otherwise noted.

The information in this document is
subject to change without notice.

