





SM3300 - Series 3300W DC POWER SUPPLIES



One or Three phase input

Models	Voltage range	Current range
SM 18-220	0 – 18 V	0 – 220 A
SM 66-AR-110 Autoranging output	0 – 33 V 0 – 66 V	0 – 110 A 0 – 55 A
SM 100-AR-75 Autoranging output	0 – 50 V 0 – 100 V	0 – 75 A 0 – 37.5 A
SM 330-AR-22 Autoranging output	0 – 165 V 0 – 330 V	0 – 22 A 0 – 11 A
SM660-AR-11 Autoranging output	0 – 330 V 0 – 660 V	0 – 11 A 0 – 5.5 A



Features

- Designed for long life at full power
- Excellent dynamic response to load changes
- Comprehensive overload and short-circuit protection
- EMC performance beyond CE (low emission, high immunity)
- Temperature-controlled fans for low audible noise
- Durable digital encoders for voltage and current adjustment

Functionalities

- Operation on single and three phase input voltages
- Built-in Ethernet interface with browser-based web interface
- Large front-panel display with menu-driven operation
- Plug-and-play optional interface modules
- Available options: High Speed Programming, Two-Quadrant Output - Power Sink, and Software control and Interfaces,

	SM 18-220	SM 66-AR-110	SM 100-AR-75	SM 330-AR-22	SM 660-AR-11
DC Power terminals					
voltage	0 - 18 V	0 - 66 V	0 - 100 V	0 - 330 V	0-660V
current	0 - 220 A	0 - 110 A	0 - 75 A	0 - 22 A	0-11 A
AC Input					
1 or 3 phase, 48 - 62 Hz	180-528 V	180-528 V	180-528 V	180-528 V	180-528 V
rated voltage range	200 - 480 V	200 - 480 V	200 - 480 V	200 - 480 V	200 - 480 V
rated frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
rated current	Max. 16 A	Max. 16 A	Max. 16 A	Max. 16 A	Max. 16 A
current (400 V / 3 ph, 3300W)	5.8 A	5.6 A	5.6 A	5.6 A	5.6 A
power factor, 3300W, 1750W	0.94, 0.92	0.94, 0.92	0.94, 0.92	0.94, 0.92	0.94, 0.92
<i>Power Derating vs input</i>					
<i>Single phase:</i>					
230 V : P _{out} max (W), I _{in} (A)	3050, 16	3100, 16	3100, 16	3200, 16	3200, 16
205 V : P _{out} max (W), I _{in} (A)	2650, 16	2700, 16	2700, 16	2800, 16	2800, 16
180 V : P _{out} max (W), I _{in} (A)	2300, 16	2400, 16	2400, 16	2400, 16	2400, 16
<i>Three phase</i>					
190 V : P _{out} max (W), I _{in} (A)	3300, 12.5	3300, 12.5	3300, 12.5	3300, 12.5	3300, 12.5
180 V : P _{out} max (W), I _{in} (A)	3100, 12.5	3100, 12.5	3100, 12.5	3100, 12.5	3100, 12.5
power factor single phase	0.99	0.99	0.99	0.99	0.99
internal fuses	20 AT	20 AT	20 AT	20 AT	20 AT
standby input power (V _o =I _o =0)	30 W	30 W	30 W	30 W	30 W
standby input power (V _o =V _{max})	60 W	50 W	50 W	50 W	60 W
Efficiency					
400 V AC, 3 ph input, full load	89 %	90 %	90 %	91 %	92 %
Regulation					
Load 0 - 100% CV	2.5 mV	5 mV	5 mV	5 mV	5 mV
Line 180 - 528 V AC CV (external voltage sense)	0.2 mV	1 mV	1 mV	3 mV	4 mV
Load 0 - 100% CC	12 mA	6 mA	2 mA	1.2 mA	1.2 mA
Line 180 - 528 V AC CC (internal voltage sense, after warm-up)	3 mA	1 mA	0.5 mA	0.2 mA	0.2 mA
		33 / 66V	50 / 100 V	165 / 330 V	330 / 660 V
Ripple + noise					
rms (BW=300 kHz) CV	3 mV	7 mV	7 mV	10 mV	15 mV
p-p (BW=20 MHz) CV	12 mV	18 mV	22 mV	50 mV	120 mV
rms (BW=300 kHz) CC	50 mA	15 / 7.5 mA	6 / 2 mA	4.5 / 1.5 mA	1.8 / 0.6 mA
p-p (BW=20 MHz) CC <i>CC-ripple at full load</i>	250 mA	90 / 45 mA	60 / 20 mA	24 / 8 mA	7.5 / 2.5 mA
Programming & monitoring accuracy (excluding INT MOD ANA)					
Voltage	± 0.1%	± 0.1%	± 0.1%	± 0.1%	± 0.1%
Current	± 0.18%	± 0.25%	± 0.25%	± 0.15%	± 0.15%
Temp. coeff., per °C¹ CV CC			35.10 ⁻⁶ 60.10 ⁻⁶		
Stability¹ after 1hr warm-up during 8 hrs CV CC t _{amb} = 25 ± 1 °C, V _{in} = 400 VAC (Internal voltage sensing for CC-stab.)			6.10 ⁻⁵ 9.10 ⁻⁵		

Programming speed² Standard Version (resistive load)	SM 18-220	SM 66-AR-110	SM 100-AR-75	SM 330-AR-22	SM 660-AR-11
Rise time (10 - 90%)					
output voltage step	0 → 15 / 18 V	0 → 33 V	0 → 50V	0 → 165 V	0 → 330 V
time, (load = 3300W)	4 / 5.5 ms	1.6 ms	3.6 ms	3.8 ms	4.2 ms
time, (load = 330 W)	2.2 / 2.6 ms	1 ms	2 ms	2 ms	2.5 ms
output voltage step	-	0 → 66 V	0 → 100 V	0 → 330 V	0 → 660 V
time, (load = 3300W)	-	7 ms	15 ms	15 ms	15 ms
time, (load = 330 W)	-	3.7 ms	8 ms	8 ms	7.5 ms
Fall time (90 - 10%)					
output voltage step	15 / 18 V → 0 V	33 V → 0 V	50 V → 0 V	165 V → 0 V	330 V → 0 V
time, (load = 3300W)	6 / 8 ms	3 ms	6 ms	6 ms	6 ms
time, (load = 330 W)	52 / 75 ms	33 ms	65 ms	65 ms	70 ms
output voltage step	-	66 V → 0 V	100 V → 0 V	330 V → 0 V	660 V → 0 V
time, (load = 3300W)	-	11 ms	26 ms	25 ms	28 ms
time, (load = 330 W)	-	100 ms	260 ms	250 ms	270 ms

Programming speed ² High Speed Version (resistive load)	SM 18-220 Option P300	SM 66-AR-110 Option P302	SM 100-AR-75 Option P303	SM 330-AR-22 Option P304	SM 660-AR-11 Option P305
Rise time (10 - 90%)					
output voltage step	0 → 15 / 18 V	0 → 33 V	0 → 50V	0 → 165 V	0 → 330 V
time, (load = 3300W)	0.17 / 0.24 ms	0.34 ms	0.46 ms	0.38 ms	0.8 ms
time, (load = 330 W)	0.13 / 0.15 ms	0.33 ms	0.46 ms	0.35 ms	0.7 ms
output voltage step	-	0 → 66 V	0 → 100 V	0 → 330 V	0 → 660 V
time, (load = 3300W)	-	0.44 ms	0.53 ms	1.6 ms	2.8 ms
time, (load = 330 W)	-	0.35 ms	0.47 ms	0.8 ms	2.0 ms
Ripple @ full load Typical (rms / pp)	15 mV / 50 mV	25 mV / 70 mV	35 mV / 120 mV	50 mV / 120 mV	60 mV / 250 mV
Output Capacitance (typical)	750 μ F	315 μ F	95 μ F	31 μ F	15 μ F
Fall time (90 - 10%)					
output voltage step	15 / 18 V → 0 V	33 V → 0 V	50 V → 0 V	165 V → 0 V	330 V → 0 V
time, (load = 3300W)	0.19 / 0.27 ms	0.34 ms	0.42 ms	0.45 ms	0.82 ms
time, (load = 330 W)	0.52 / 0.75 ms	1.6 ms	1.4 ms	4.3 ms	8 ms
output voltage step	-	66 V → 0 V	100 V → 0 V	330 V → 0 V	660 V → 0 V
time, (load = 3300W)	-	0.58 ms	0.53 ms	2.1 ms	3.4 ms
time, (load = 330 W)	-	5.7 ms	5 ms	17 ms	30 ms

	SM 18-220	SM 66-AR-110	SM 100-AR-75	SM 330-AR-22	SM 660-AR-11
Recovery time range		33 V / 66 V	50 V / 100 V	165 V / 330 V	330 V / 660 V
recovery within	50 mV	100 mV	100 mV	500 mV	800 / 500 mV
di/dt of load step	2.7 A/ μ s	1.7 / 0.7 A/ μ s	1.1 / 0.5 A/ μ s	0.35 / 0.17 A/ μ s	0.16 / 0.08 A/ μ s
output voltage	15V	30V / 60V	45V / 90V	150 / 300 V	300 / 600 V
time, @ 50 - 100% load step	100 μ s	100 μ s	100 μ s	100 μ s	100 μ s
max. deviation	250 mV	260 / 180 mV	180 / 80 mV	1.8 / 1.4 V	2.2 / 1.8 V
Output impedance					
CV, 0-1 kHz	< 0.8 m Ω	< 3 m Ω	< 1.8 m Ω	< 30 m Ω	< 60 m Ω
CV, 1-100 kHz	< 12 m Ω	< 25 m Ω	< 18 m Ω	< 250 m Ω	< 600 m Ω
Pulsating load					
max. tolerable AC component of load current					
f > 1 kHz	25 A _{rms}	20 A _{rms}	11 A _{rms}	<i>t.b.d.</i>	<i>t.b.d.</i>
f < 1 kHz	220 A _{peak}	110 A _{peak}	75 A _{peak}	22 A _{peak}	11 A _{peak}

Insulation					
AC power terminals / DC power term. creepage / clearance		3750 V _{rms} (1min.) 8 mm		3750 V _{rms} (1min.) 8 mm	3750 V _{rms} (1min.) 8 mm
AC power terminals / case DC power terminals / case		2500 V _{rms} 1000 V DC ³		2500 V _{rms} 1330 V DC ³	2500 V _{rms} 1400 V DC ³
Safety	cTUVus / EN 60950 / EN 61010				
EMC Emission Immunity	EN 61326-1, class B equipment (for use in domestic establishments) EN 61326-1, equipment for use in industrial and domestic establishments				
Operating Temperature at full load	-20 to + 50 °C derate output to 75% at 60 °C				
Humidity	maximum 95% RH, non-condensing, up to 40 °C maximum 75% RH, non-condensing, up to 50 °C				
Storage temperature	-40 to + 70 °C				
Thermal protection	output shuts down in case of insufficient cooling				
MTBF	500 000 hrs				

	SM 18-220	SM 66-AR-110	SM 100-AR-75	SM 330-AR-22	SM 660-AR-11
Hold-Up time (@ 400 VAC input)					
V _{out} = 100%, P _{out} = 3300 W	6 ms	12 ms	12 ms	12 ms	12 ms
I _{out} = 100%, P _{out} = 3300 W	13 ms	13 ms	13 ms	13 ms	13 ms
V _{out} = 100%, P _{out} = 1750 W	18 ms	24 ms	24 ms	24 ms	24 ms
Turn on delay after mains switch on	1.4 s				
Inrush current	15 A				

Notes: 1. Measured at full load. 2. Signal latency depends on the interface used & data traffic. 3. See "Safety instructions" in the product manual. 4. With optional Interface. For details see 'Datasheet Interfaces SM3300 series'.

	SM 18-220	SM 66-AR-110	SM 100-AR-75	SM 330-AR-22	SM 660-AR-11
Series operation max. total voltage Master / Slave operation ⁴	1000 V ³ yes	1000 V ³ yes	1000 V ³ yes	1330 V ³ yes	1330 V ³ yes
Parallel operation Normal Master / Slave operation ⁴	no limit maximum 8 units				
Remote sensing max. voltage drop per load lead	2 V				
Limits Voltage adjust range Current adjust range	0 - 101 % 0 - 101 %				
Potentiometers front panel control with knobs resolution	15 bits				
Meters scale voltage scale current accuracy read output read limit setting	4 digit 0.00 - 18.00 V 0.0 - 220.0 A 0.2% + 2 digit 0.3% + 2 digit	4 digit 0.00 - 66.00 V 0.0 - 110.0 A 0.2% + 2 digit 0.3% + 2 digit	4 digit 0.0 - 100.0 V 0.00 - 75.00 A 0.2% + 2 digit 0.3% + 2 digit	4 digit 0.0 - 330.0 V 0.00 - 22.00 A 0.2% + 2 digit 0.3% + 2 digit	4 digit 0.0 - 660.0 V 0.00 - 11.00 A 0.2% + 2 digit 0.3% + 2 digit

Mounting	stacking of units allowed, air flow is from left to right
AC Terminals (CON D)	screw terminals for wire 2.5 - 4 mm ² , 3 phase + earth (no neutral)
DC Terminals (CON B1 & B2)	M8 bolts
Programming connectors (LAN)	standard with RJ45-connector for Ethernet at rear panel, 100 Mb/s, full-duplex
Interlock (CON A)	input for contact at rear panel
Cooling audio noise level air flow	low noise blower, fan speed adapts to temperature of internal system ca. 50 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 57 dBA at full load, 50 °C ambient temperature, 1 m distance From left to right
Enclosure degree of protection	IP20
Dimensions front panel: h x w behind front panel: h x w x d	88.1 x 483 mm (19", 2 U) 86 x 448 x 455 mm (excluding feet) with optional interfaces the required depth is 500...530mm
Weight	15 kg

CV = Constant Voltage
CC = Constant Current

Specifications measured at
 $t_{amb} = 25 \pm 5 \text{ °C}$ and $V_{in} = 400 \text{ VAC}$,
50 Hz unless otherwise noted.

The information in this document is
subject to change without notice.

Notes:

1. Measured at full load.
2. Signal latency depends on the interface used and data traffic.
3. See "Safety Instructions" in the product manual.
4. With optional 'plug-and-play' interface. For details see 'Datasheet Interfaces SM3300 series'.

Typical Applications

- PV-Simulation and inverter testing
- Automotive battery simulations
- PWM-controlled DC motor testing
- Car testing systems
- Controlled battery (dis)charging
- Accurate current sources
- ATE in industrial production lines
- Lasers
- Aerospace
- Plasma chambers
- Sustainable energy
- Military

Standard Features



Digital CV- and CC-Settings

Reliable, long-life digital encoders are implemented at the front panel. Includes total front panel lock (also for CV- / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Ethernet Interface

Ethernet interface for programming and monitoring



Sequencer

Arbitrary Waveform generator or standalone automation.



High Voltage Isolation

A high DC output isolation allows floating operation up to 1000 V for SM18-220, SM66-AR-110 and SM100-AR-75, and up to 1330V and 1400 V for SM330-AR-22 and SM660-AR-11.



USB-Input

Feature not yet available.
Front and rear panel USB inputs (Host / Type-A) are planned for the exchange of settings and waveforms.
A web interface is available for uploading sequences.

Options



High Speed Programming

A 10 to 20 times higher programming speed (down to 0.2ms rise time at full load) and lower output capacitance. Excellent for laser applications, test systems or as current source with low parallel capacitance as used in plasma chambers. For more information, see the programming speeds in the programming speed table in this data sheet.

Option Codes:

- SM 18-220 – P300
- SM 66-AR-110 – P302
- SM 100-AR-75 – P303
- SM 330-AR-22 – P304
- SM 660-AR-11 – P305



Two-Quadrant Output Power Sink

Two quadrant operation maintains the DC output voltage constant regardless the output power is positive or negative. Ideal for PWM-speed controlled DC-Motors and ATE systems. Consult the [power sink data sheet](#) for more information.

Option Codes:

- SM 18-220 – P306
- SM 66-AR-110 – P308
- SM 100-AR-75 – P309
- SM 330-AR-22 – P310
- SM 660-AR-11 – P311

Interfaces




Plug-and-play extension modules

Interfacing and functional capabilities of the power supply can be extended at any time by inserting modules. Four slots are available at the rear of the power supply unit. Consult the [interfaces data sheet](#) for more information.

Modules:

- **Analog programming** (INT-MOD-ANA)
High speed and accuracy
- **Anybus carrier** (INT-MOD-ANY)
Carrier for Anybus CompactCom 40 fieldbus inserts:
CANopen, EtherCAT, Ethernet/IP, Modbus-TCP, POWERLINK, PROFIBUS, PROFINET
- **Digital I/O** (INT-MOD-DIG)
Interacts with sequencer
- **Isolated contacts** (INT-MOD-CON)
Relay and interlock contacts
- **Serial communication** (INT-MOD-SER)
RS232, RS485, RS422, USB
- **Simulation interface** (INT-MOD-SIM)
For PV-simulation, foldback, etc.
- **Master/Slave** (INT-MOD-M/S)
Series/parallel output configuration

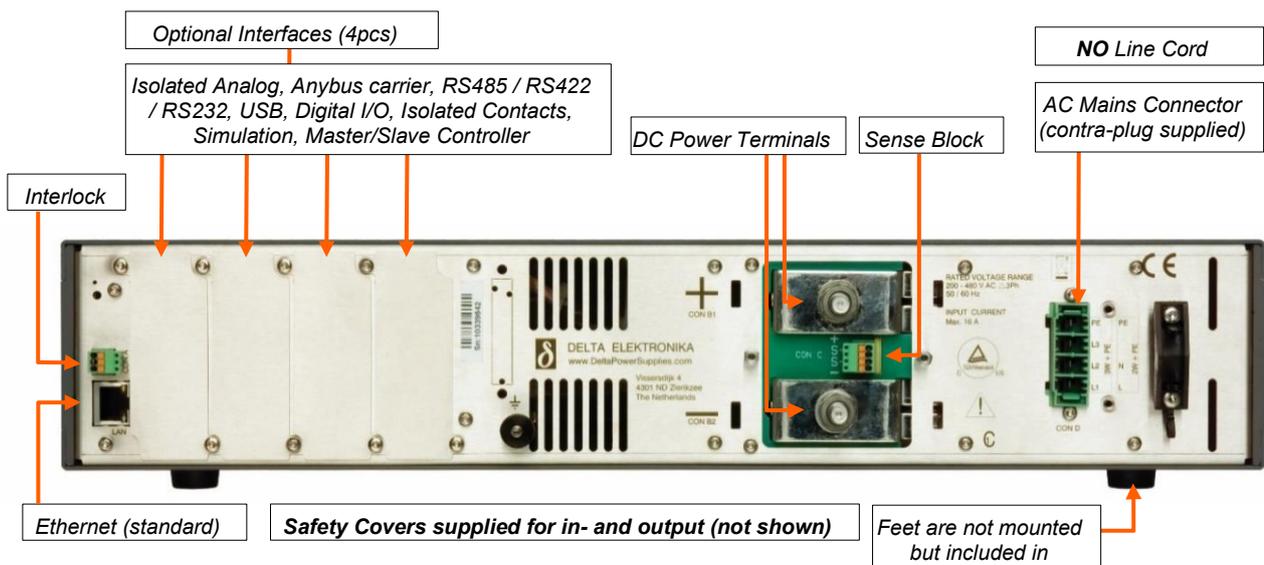

Where to buy?

Visit our [website to request a quote](#), free of charge.

Alternatively, contact us directly or get in touch with one of our [authorized distributors](#).

Delta Elektronika B.V.
Vissersdijk 4, 4301ND
Zierikzee
The Netherlands

T: +31 111 413656

E: via [contact form on our website](#)

W: www.DeltaPowerSupplies.com

